

Hot stamping foil is made by printing dye and pigments onto base film such as PET.

LAYER AND SPECIFICATION

| |
|-----------------|
| Primer |
| Metallic Layer |
| Printing |
| Releasing Layer |
| Base Film |

- For bonding with textile/garment
- For metallic effect
- Color printing
- For releasing after lamination
- Carrier film.


THICKNESS : 12mic. 16mic. 23mic.

WIDTH : 640mm, 750mm, 1520mm

LENGTH : 100-120meter, 2000-3000meter per roll

CORE : 1inch, 3inch

APPLICATION

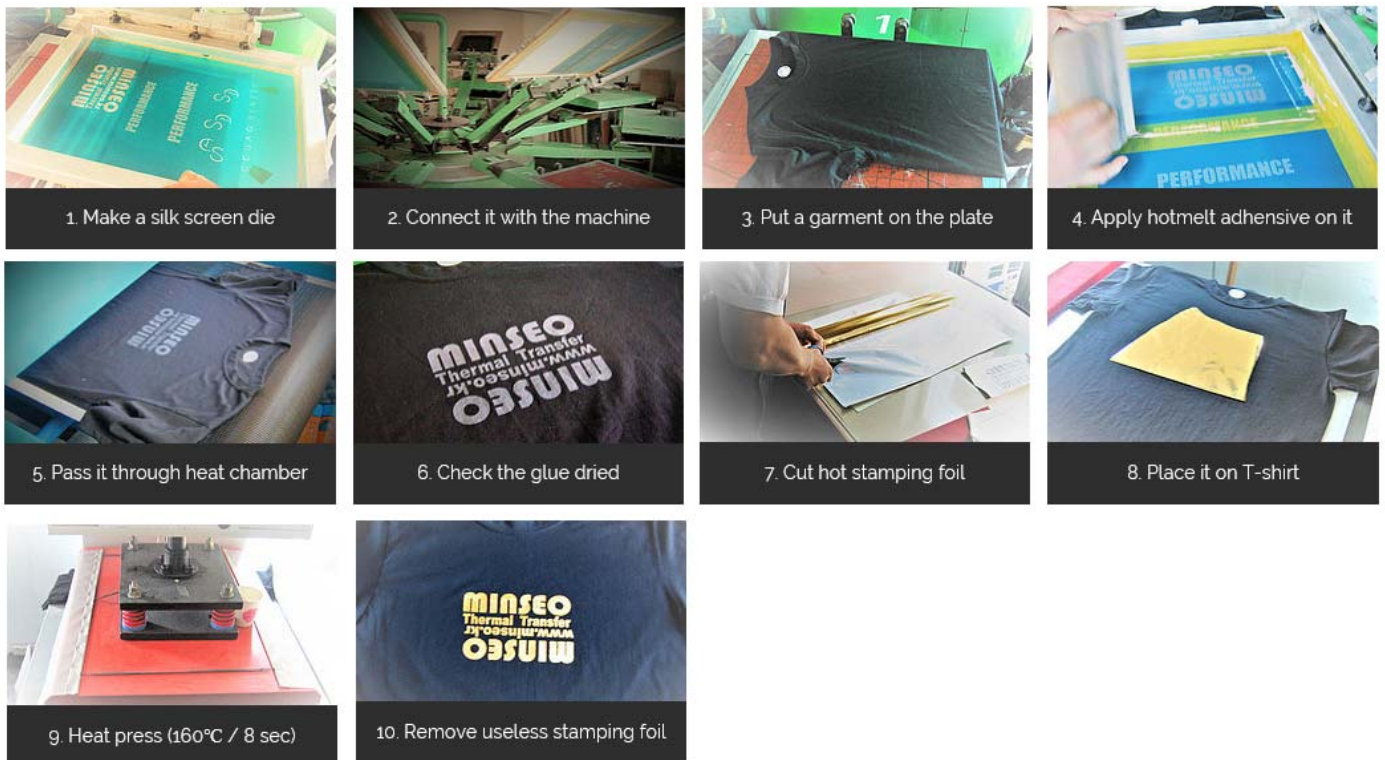

All technical information and recommendations are based on tests we believe to be reliable. However, we cannot guarantee performance for conditions not under manufacturer's control. Before using, please determine the suitability of product for its intended use. The user assumes all risk and liability whatsoever in connection with the use of this product. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

LAST UPDATED 01/2022

MINSEO COATING FELX CO., LTD.

ADDRESS : 382 Jeongmun-ro, Wollong-myeon, Paju-si, Gyeonggi-do, Republic of Korea, 10947
 TEL: 82 31 991 4301 FAX: 82 31 991 4302 EMAIL: info@minseo.kr URL: www.minseo.kr